



ALTAIR P-PN



Technical features

Belt grinding machine with table belt stretcher

Self braking motor, single speed, double speed or multispeed with inverter

Belt protection guard with double suction point $\varnothing 150\text{mm}$

Swinging belt stretcher (vertical or horizontal positioning)

Aadjustable piece support plate

Pneumatic belt tensioning



Push button panel 24V

E-stop foot pedal


Technical data

model	Altair P-PN 1v	Altair P-PN 2v	Altair P-PN Mv
Power supply	3P+T 400V-50Hz		
Motor rating [kW]	5,5	5,5/4,4	5,5
Speed [rpm]	3000	3000/1500	600-3600
Speed [m/s]	30	15/30	6-36
Belt development [mm]	2500x300	2500x300	2500x300

Altair P-PN

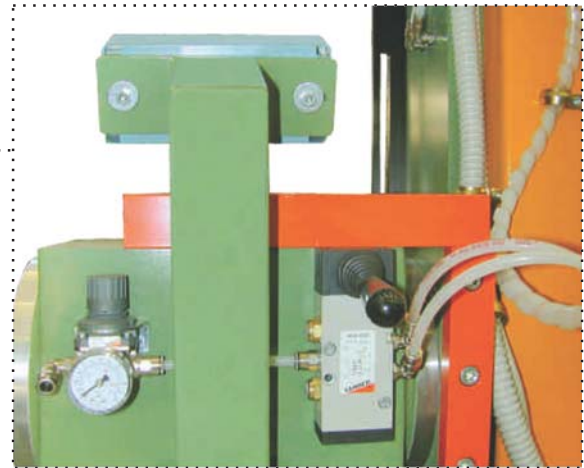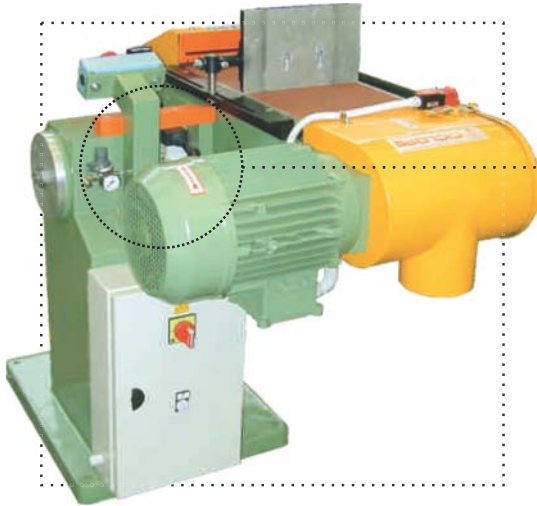

The belt stretcher can be used in vertical or horizontal position

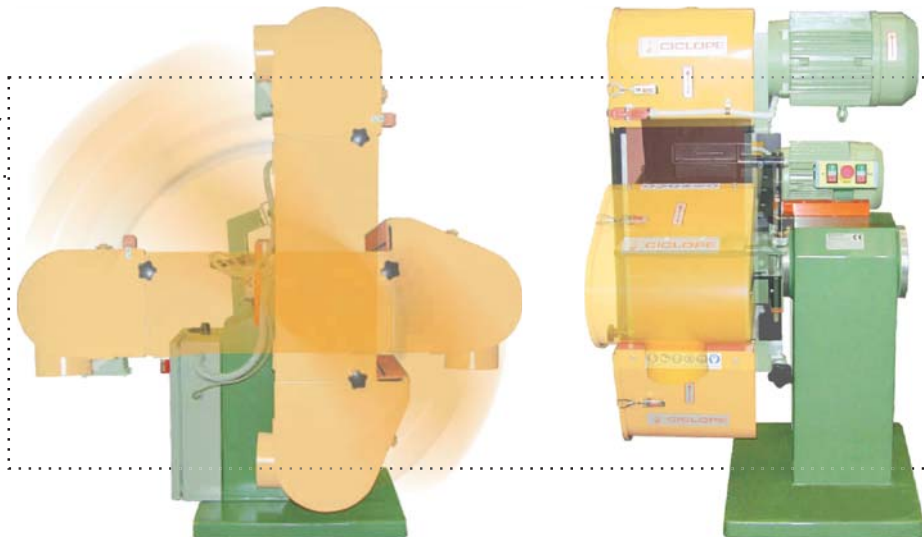

Products in compliance with the Machine Directive 98/37/CE

Ciclope reserves the possibility of change, without notice, the dimensions and the executions of the products listed in this brochure.

March 1, 2010

Contact information update:

We have begun the long arduous process of moving our office.
Please continue to direct mail to:

Sawyer and Smith Corporation
5412 Homegardner Road
Castalia, Ohio 44824

All phone contact to:
423.289.6894

All other email and website information remains the same. You can contact us at any of the existing web addresses. Email is received remotely and responded to more quickly and efficiently than a phone message. If you call the office, please leave a thorough message INCLUDING your email address so that we can send you the required information as soon as possible.

Thank You.