




SD-PLA 250/MV

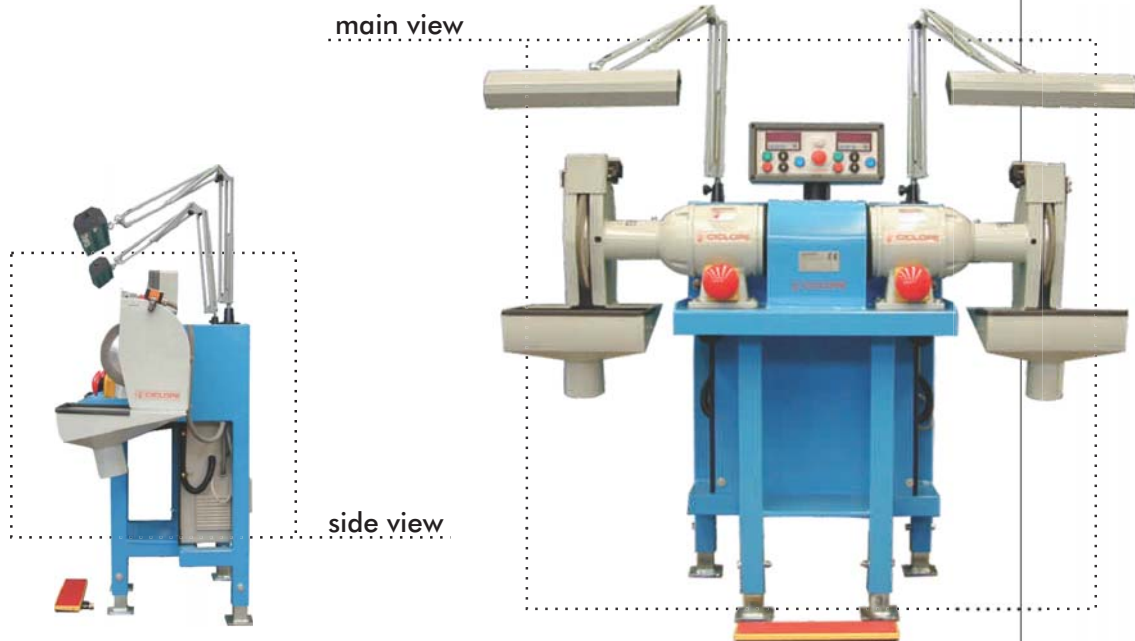

Technical features

- › **M**achine suitable for dry operations of polishing, brushing and surface finishing with low stock removal
- › **2** self-braking independent motors PLA 250/2 HP 2 P2 400V-50Hz
 - › **A**adjustable speed from 600 to 3600 rpm
 - › **S**pindles $\varnothing 25 \times 100$ mm
 - › **B**rushes protection guards $\varnothing 300 \times 50$ mm MAX
- › **S**uction point $\varnothing 100$ mm with removable protection net
- › **A**adjustable bench height from 915 to 1165 mm
- › **L**ighting: fluorescent neon lamps 2 x 15W with switch
- › **C**olors: bench RAL 5012; motors and hoods RAL 7035
- › **O**verall dimensions: 1550X650 h1200-1450 mm
- › **W**eight: 225 kg


SD-PLA 250/MV



Neon lamp



Push-button panel




Protection casing



Safety Switch



Stop Pedal

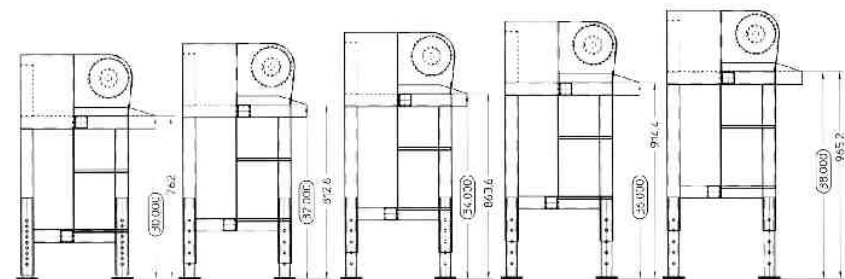

Height adjustment (step 25mm)

Machines in compliance with the Machine Directive 98/37/CE

Ciclope reserves the possibility of change, without notice, the dimensions and the executions of the products listed in this brochure.

March 1, 2010

Contact information update:

We have begun the long arduous process of moving our office.
Please continue to direct mail to:

Sawyer and Smith Corporation
5412 Homegardner Road
Castalia, Ohio 44824

All phone contact to:
423.289.6894

All other email and website information remains the same. You can contact us at any of the existing web addresses. Email is received remotely and responded to more quickly and efficiently than a phone message. If you call the office, please leave a thorough message INCLUDING your email address so that we can send you the required information as soon as possible.

Thank You.