



SSD 250/2 MV



Technical features

- › **M**achine suitable for low stock removal belting workings
- › **2** independent self-braking motors PLA 250/2 HP 2 P2 400V-50Hz
 - › **A**adjustable speed from 600 to 3000 rpm
- › **T**wo pneumatic belt stretchers with easy belt tracking system
 - › **P**rotection guards with safety switch
 - › **C**ontact wheels up to $\varnothing 250 \times 50$ mm
 - › **A**adjustable wheel protection guards
- › **S**uction points $\varnothing 100$ with removable protection net
- › **B**ench height adjustment from 915 to 1165 mm
- › **T**wo neon lamps 2 x 15W with switch
- › **P**ush button control panel 24V complete of pressure micro-regulators and gauges
 - › **W**eight: 490 kg

SSD 250/2 MV



Pneumatic cylinder



Neon lamp




Adjustable wheel guard



Push-button control panel




Safety switch

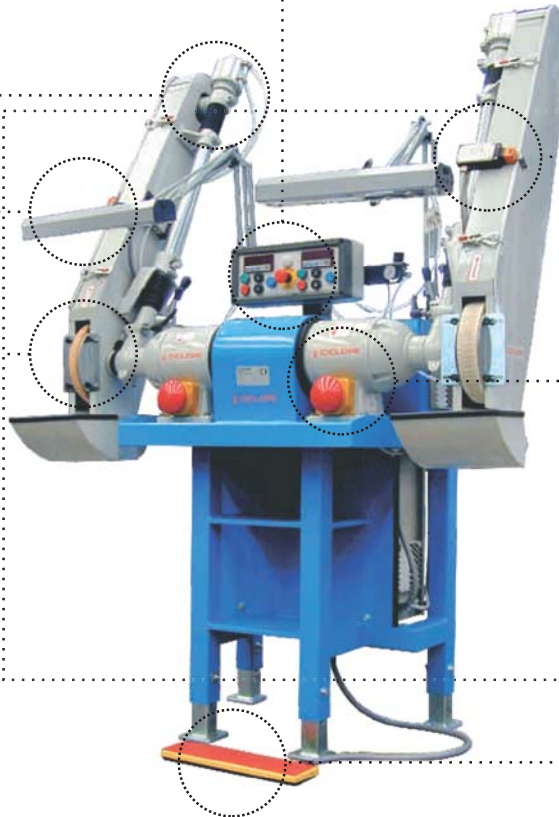

Motor
PLA 250/2



E-Stop
foot pedal

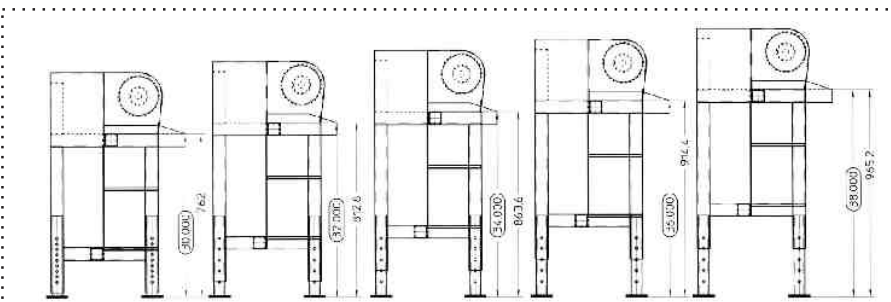

Adjustable height (step 25mm)

Products in compliance with the Machine Directive 98/37/CE

Ciclope reserves the possibility of change, without notice, the dimensions and the executions of the products listed in this brochure.

March 1, 2010

Contact information update:

We have begun the long arduous process of moving our office.
Please continue to direct mail to:

Sawyer and Smith Corporation
5412 Homegardner Road
Castalia, Ohio 44824

All phone contact to:
423.289.6894

All other email and website information remains the same. You can contact us at any of the existing web addresses. Email is received remotely and responded to more quickly and efficiently than a phone message. If you call the office, please leave a thorough message INCLUDING your email address so that we can send you the required information as soon as possible.

Thank You.